



Infrared Sensor CMW102

Bracket for infrared sensor



Smart Parking Series


NEW

Infrared Sensor CMW102



สามารถใช้เฉพาะอินฟราเรดเซ็นเซอร์ ในการยึดติดผนังโดยไม่ใช่ขาตั้งได้

Infrared Photocell

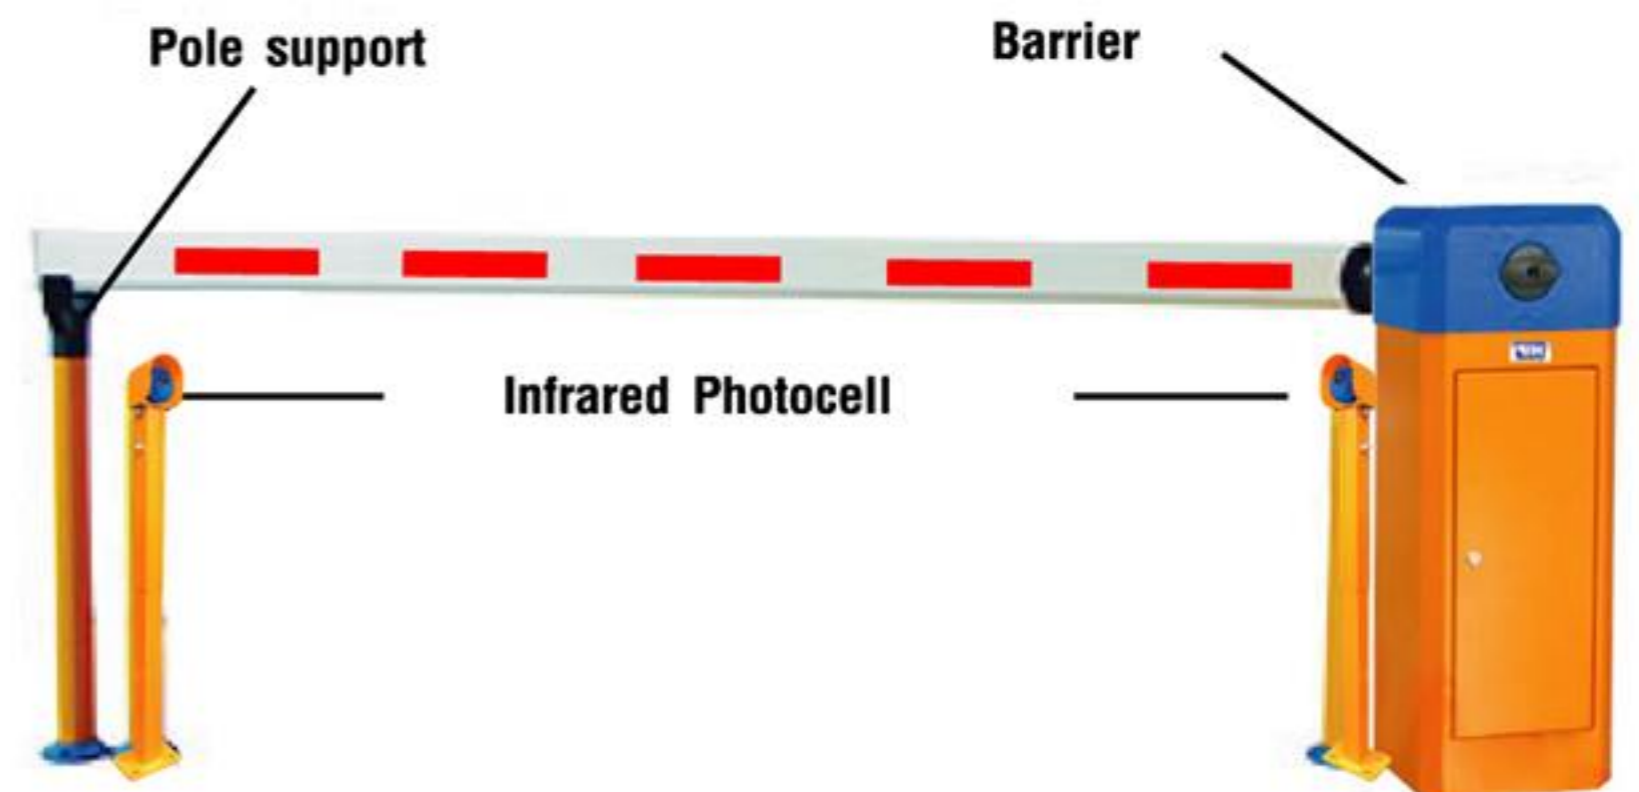

Our main products are automatic barrier gates (barrier, barrier gate, boom barrier, automatic barrier, traffic barrier, car park barrier,) for car parking lot, turnstile, automatic turnstile, tripod turnstiles, sliding gate operators, swing gate operators, flap barriers, swing barriers, speed gates, and full height turnstiles.


Infrared Sensor CMW102

ขนาดเล็ก ติดตั้งง่าย สามารถยึดติดกับตู้ไม้กั้นหรือติดตั้งเสาตามความเหมาะสม Infrared Sensor CMW102 มีระยะการอ่านตั้งแต่ 1-8 เมตร รองรับทั้งระบบ Carpark system, Folding Gate Motor sliding gate และอุปกรณ์อื่นๆ ได้

FEATURE

Operating Temperature:	-0 °C to +115 °C (You have Wejoin temperature-increasing equipment as an option in the lowest temperature)
Rated Voltage:	12V DC
Remote distance:	Maximum 30 M
Beam Speed:	1.2 seconds, 3 seconds, 6 seconds
Beam length:	Routine straight beam is within 6 meters, folding beam is within 5 meters, two fence beam is within 4.5 meters, three fence beam is within 4 meters, special beam (6 seconds) the straight beam can be 8 meters, folding beam can be 7 meters, and fence beam can be 6 meters.

Bracket for infrared sensor

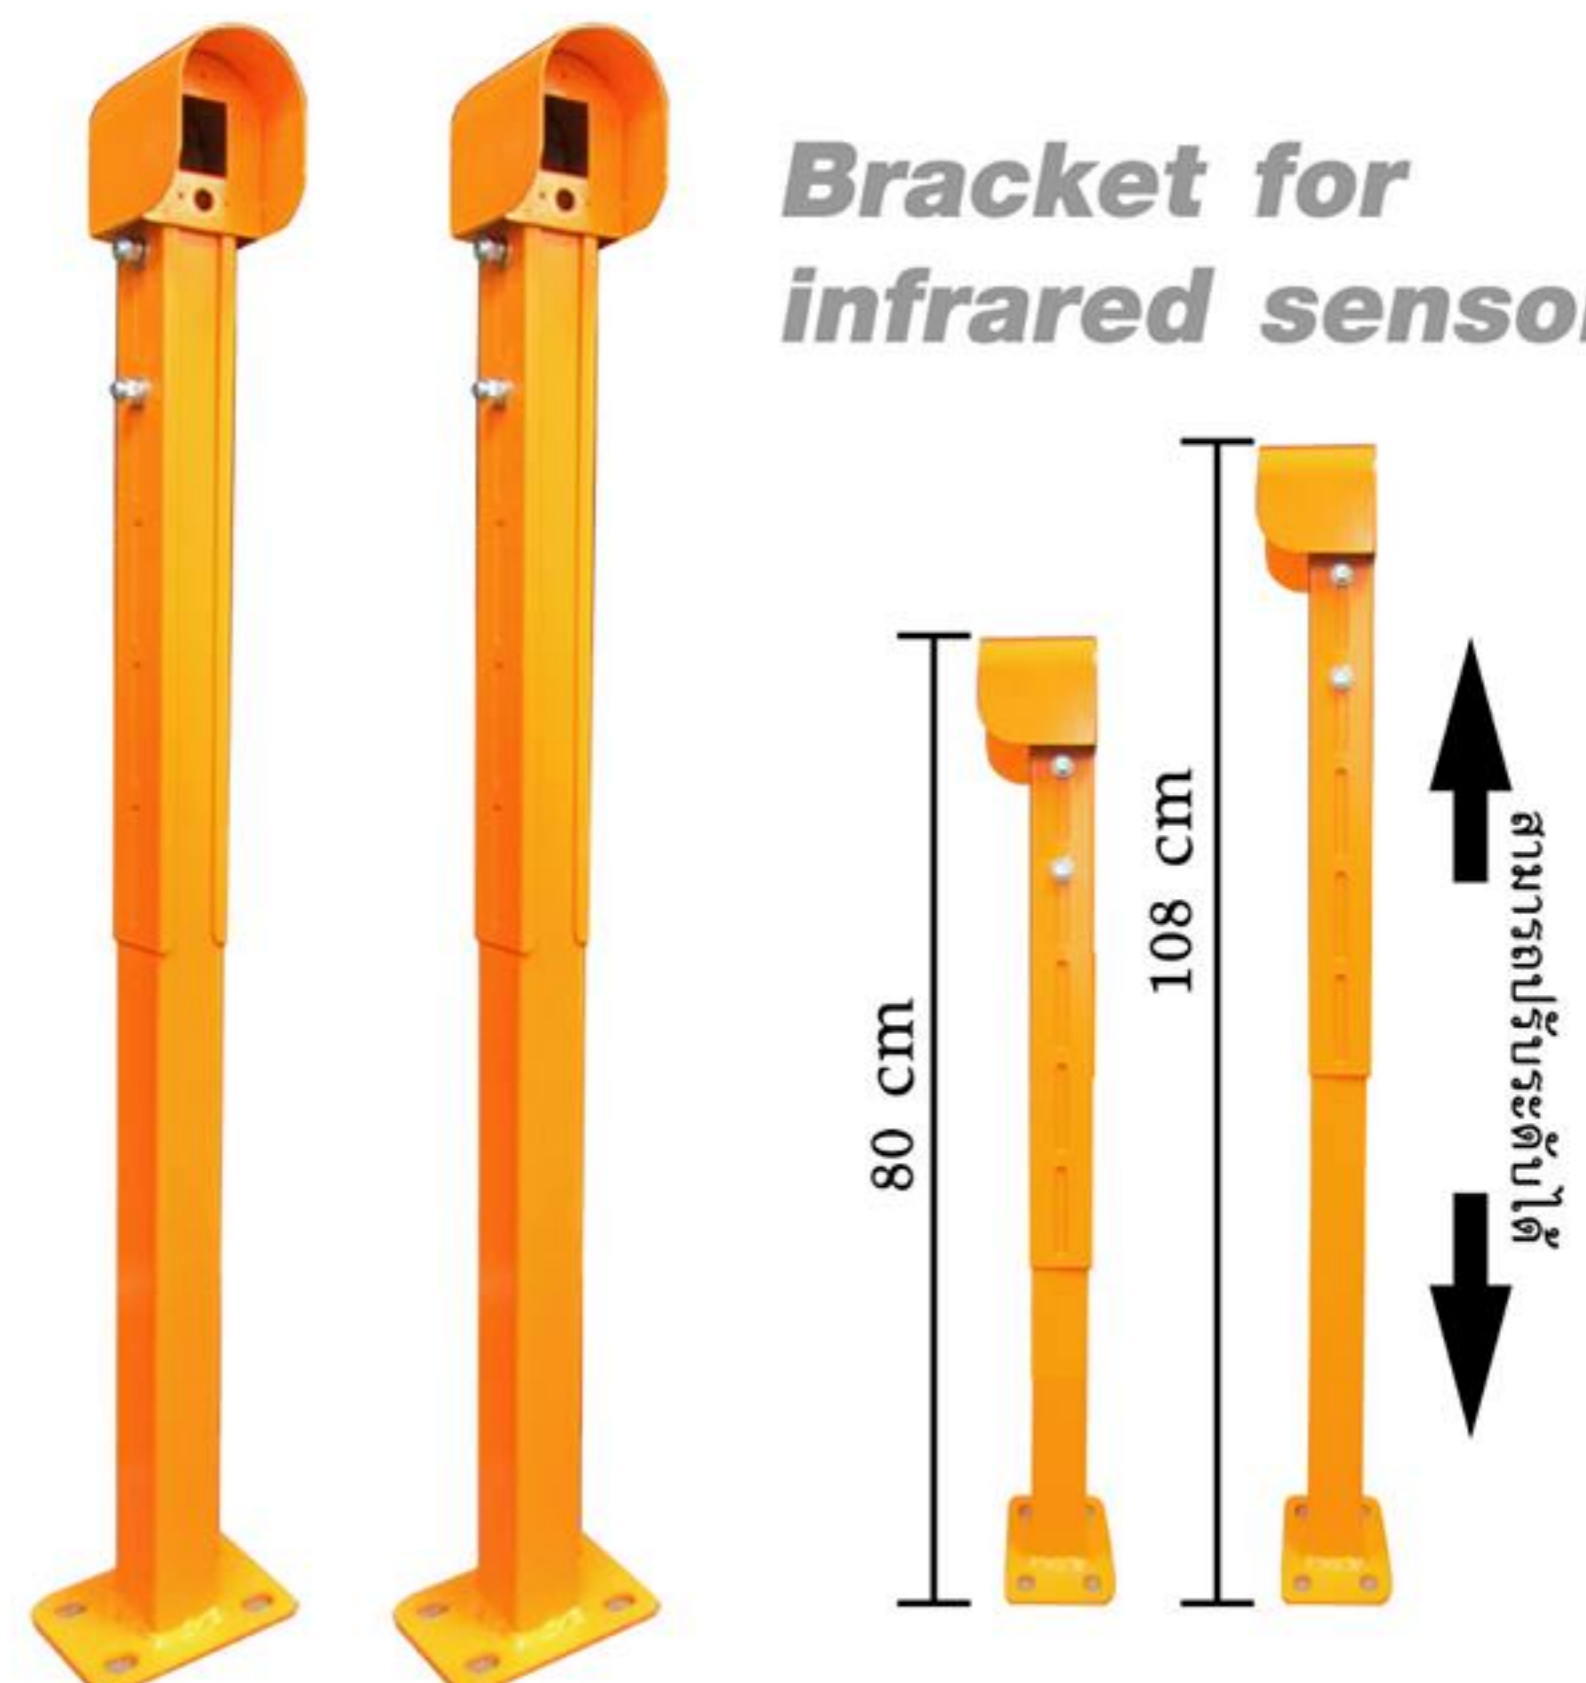



CMW103

Bracket for Infrared Sensor



CMW103

Bracket for Infrared Sensor
(ใช้กับ CMW102, CMB303)



Sensor 1-15m



Specifications

Model	CMB303	CMW102
Working Voltage	DC/AC 12V or 24V	DC/AC 12V or 24V
Working Current	15 – 30mA	15 – 30mA
Working Temperature	-30°C ~ 70°C	-30°C ~ 70°C
Sensor IR Distance	≤15m	≤10m
Wave length	940nm	940nm
Response Time	30ms	30ms
Relay Output	COM/NO/NC	COM/NO
Dimensions	45 x 20 x 77mm	82 X 70 X 25 mm

ติดตั้งไว้ได้แนวแกนกันรถยนต์
ทำหน้าที่เป็นเสาในการติดตั้ง Sensor
เพื่อป้องกันไม้กั้นปิดลงตีรถยนต์
ปรับระดับความสูงได้ 80-108cm
**เฉพาะเสาไม่รวม Sensor*

