




Highest Ideas Products



THE BEST SECURITY SOLUTION

Smart Parking Series

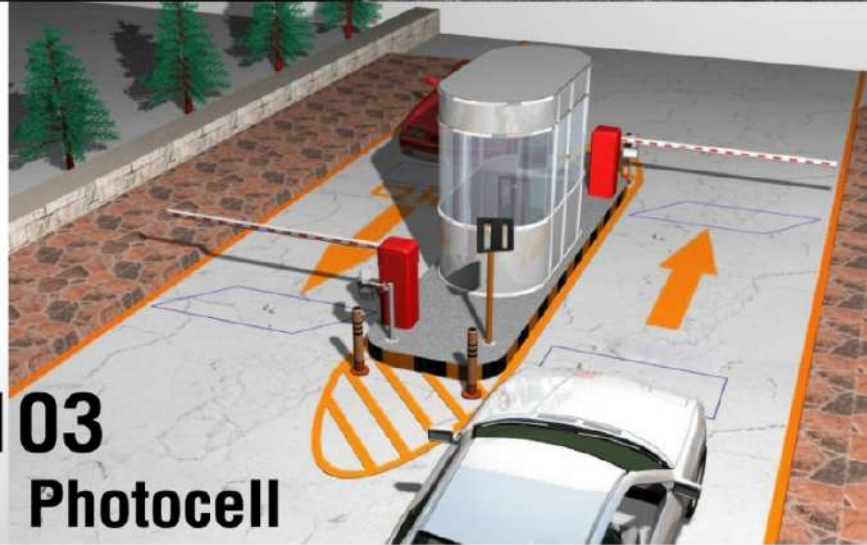

# CMW103 Infrared Photocell

Our main products are automatic barrier gates ( barrier, barrier gate, boom barrier, automatic barrier, traffic barrier, car park barrier, ) for car parking lot, turnstile, automatic turnstile, tripod turnstiles, sliding gate operators, swing gate operators, flap barriers, swing barriers, speed gates, and full height turnstiles.

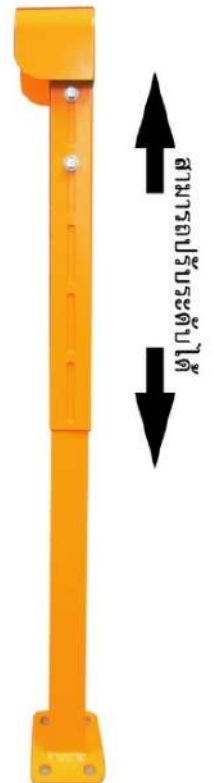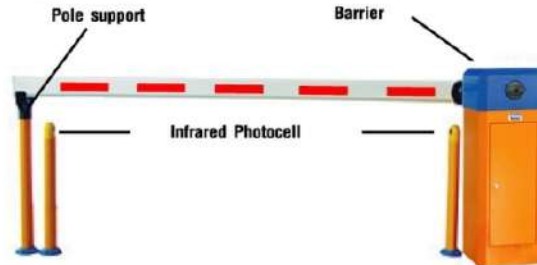

FEATURE	
Operating Temperature:	-0°C to +115°C (You have Wejoin temperature-increasing equipment as an option in the lowest temperature)
Rated Voltage:	12V DC
The relative temperature:	Less than 90%
Remote distance:	Maximum 30 M
Beam Speed:	1.2 seconds, 3 seconds, 6 seconds
Beam length:	Routine straight beam is within 6 meters, folding beam is within 5 meters, two fence beam is within 4.5 meters, three fence beam is within 4 meters, special beam (6 seconds) the straight beam can be 8 meters, folding beam can be 7 meters, and fence beam can be 6 meters.
Beam type:	3 seconds barrier beam are 100 x 45 Octagon beam (Yellow and or White color), 1.2 seconds barrier beam are 80 x 45 Octagon beam or Ellipse beam.





# CMW103

Bracket for Infrared Sensor



## CMW103

Bracket for Infrared Sensor  
(ใช้กับ CMW102, CMB303)



Sensor 1-15m



## Specifications

Model	CMB303	CMW102
Working Voltage	DC/AC 12V or 24V	DC/AC 12V or 24V
Working Current	15 – 30mA	15 – 30mA
Working Temperature	-30°C ~ 70°C	-30°C ~ 70°C
Sensor IR Distance	≤15m	≤10m
Wave length	940nm	940nm
Response Time	30ms	30ms
Relay Output	COM/NO/NC	COM/NO
Dimensions	45 x 20 x 77mm	82 X 70 X 25 mm

ติดตั้งไว้ได้แนวแกนกันรถยนต์  
ทำหน้าที่เป็นเสาในการติดตั้ง Sensor  
เพื่อป้องกันไม้กั้นปิดลงตีรถยนต์  
ปรับระดับความสูงได้ 80-108cm  
*\*เฉพาะเสาไม่รวม Sensor*

