



HIP



Model: **CMU9312** 2MP LightHunter Dual-lens Network PTZ camera

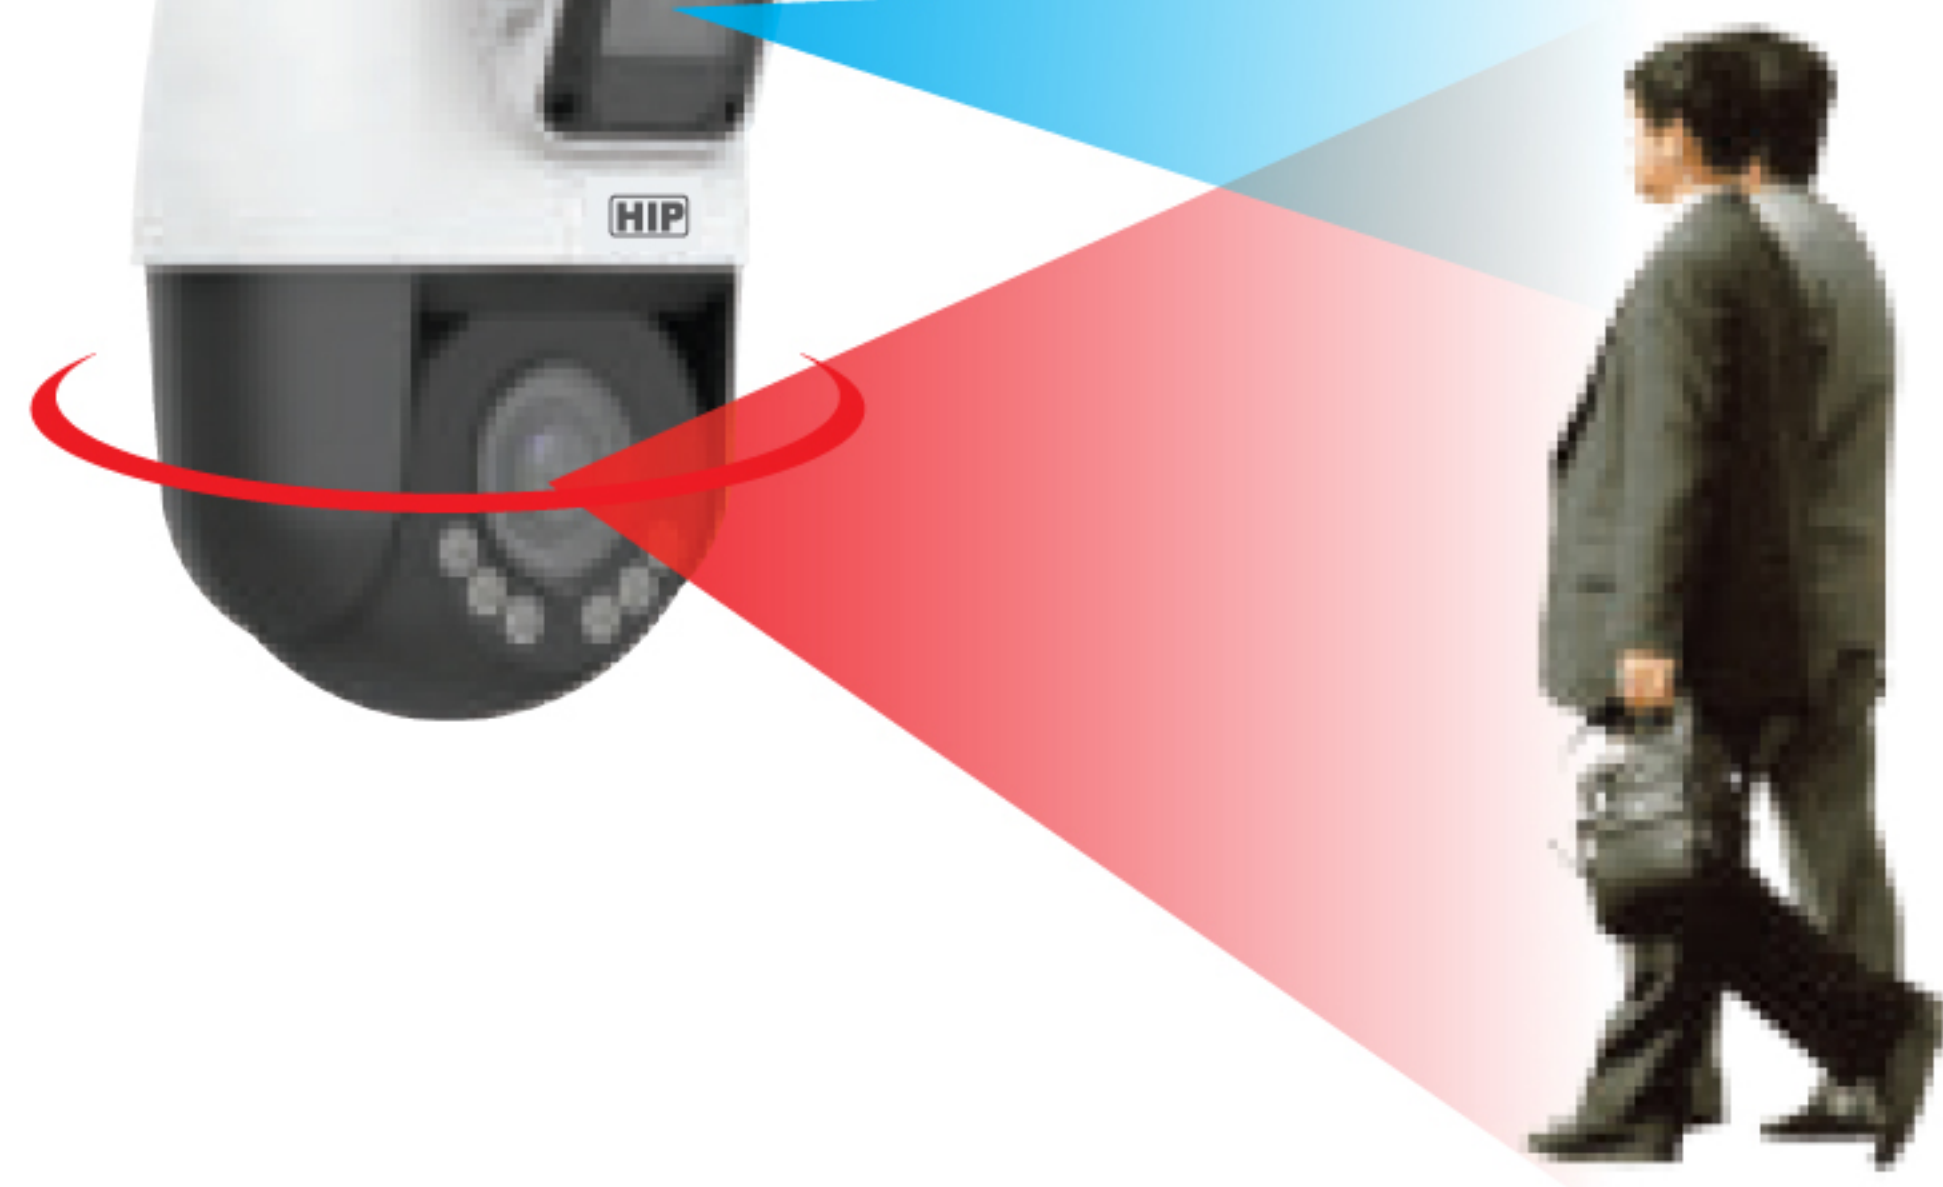

(ระบบกล้อง 2 in 1 ตัวไว้หมุนตามคน อีก 1 ตัวอยู่กับที่)

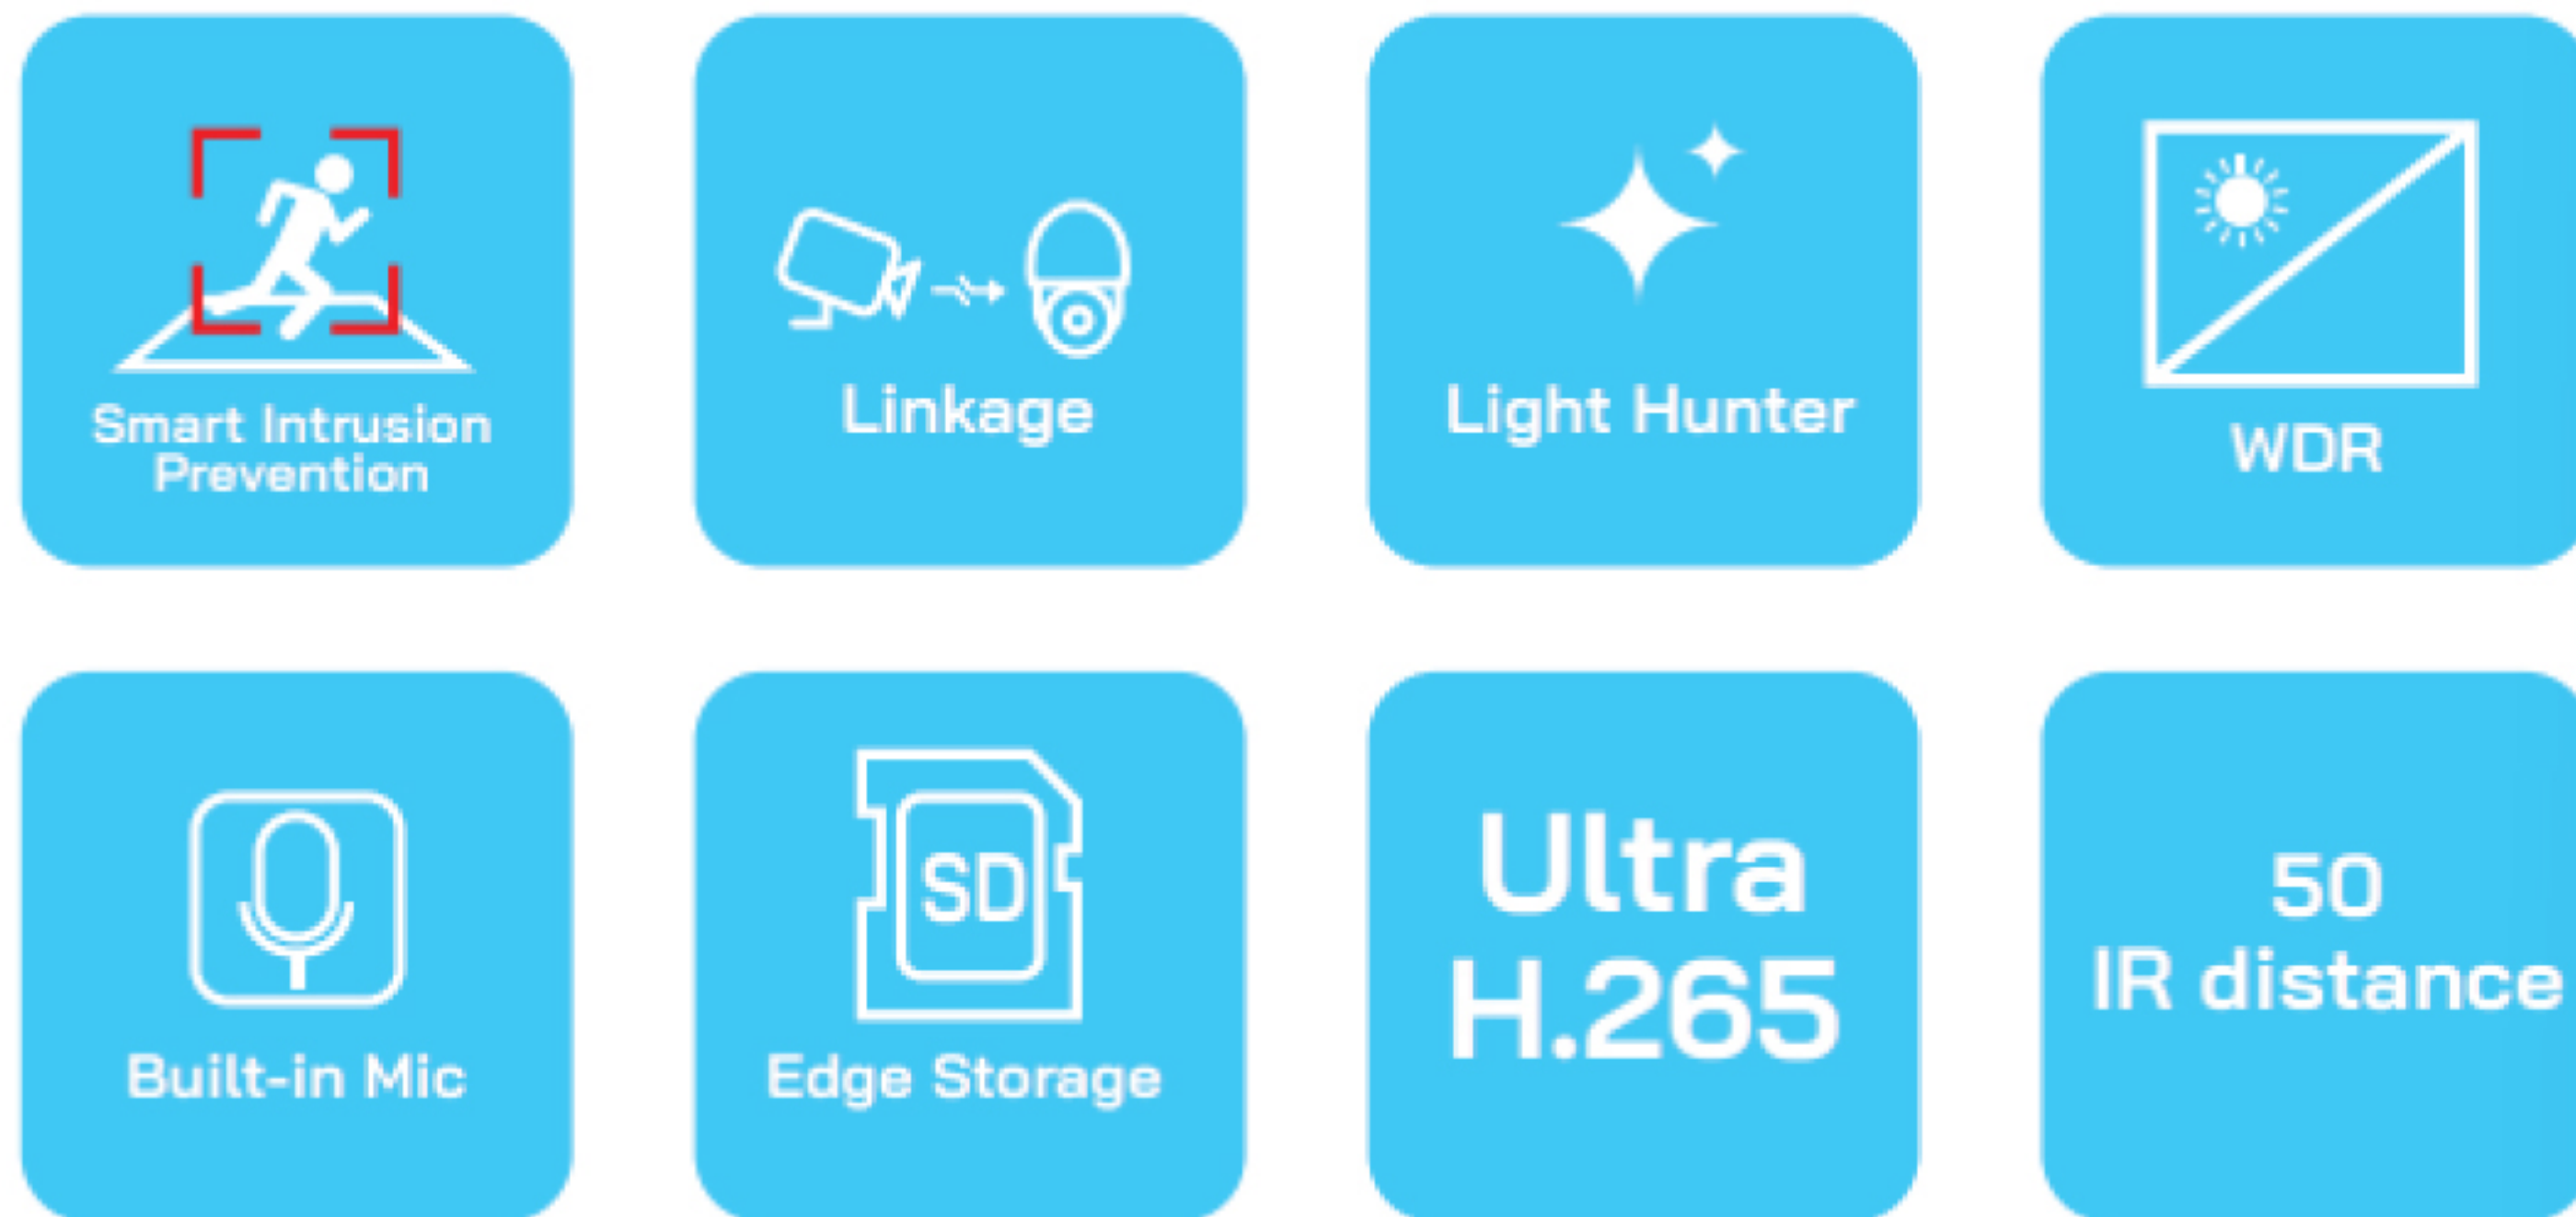

FEATURES

- Fixed camera and PTZ camera integration, dual channels with one IP, look at overall situation and consider details at the same time
- High quality image with 2MP, 1/2.8" CMOS sensor
- 1920*1080@25fps in the mainstream
- Ultra 265, H.265, H.264, MJPEG
- 4X optical zoom of PTZ channel allows for closer viewing of subjects
- Smart intrusion prevention, support false alarm filtering, include Cross Line, Intrusion, Enter Area, Leave Area detection
- PTZ channel can be linked by fixed channel' smart intrusion prevention to track the objects triggering the rule
- Lighthunter technology ensures ultra-high image quality in low illumination environment
- Up to 120 dB Optical WDR (Wide Dynamic Range)
- Built-in 2*mic & high-power speaker, support two-way audio, has better sound performance
- Support ceiling mount and wall mount
- IR & warm light illumination to deal with different scenes and achieve full-color illumination
- DC12V or PoE+(IEEE 802.3at) power supply

Specifications

| | | | | | |
|--------------------------|--|---|---------------|---------------|--------------|
| Model | CMU9312 | Detail | | | |
| Camera | Panorama | | | | |
| Sensor | 1/2.8", 2MP, CMOS | | | | |
| Min. Illumination | Colour: 0.002Lux (F1.6, AGC ON) 0Lux with IR on | Color:0.002 lux (F1.6, AGC ON) 0 lux with IR/Warm light | | | |
| Day/Night | IR-cut filter with auto switch (ICR) | | | | |
| Shutter | Auto/Manual, shutter time: 1s ~ 1/100000 s | | | | |
| WDR | 120dB | DWDR | | | |
| s/N | | | | | |
| Lens | >52dB | | | | |
| Lenstype | 2.8mm @F1.6 | 2.8~12mm@F1.6 , AFautomaticfocusing and motorized zoom lens | | | |
| Optical Zoom | N/A | X4 | | | |
| Iris | Fixed aperture | | | | |
| Field of View (H) | 102.4" | 106.6" ~ 30.6 | | | |
| Field of View (V) | 54.9" | 56.5" ~ 17.4" | | | |
| Field of View (D) | 133.1" | 138.6" ~ 37.6 | | | |
| DORI | | | | | |
| DORI Distance | Lens (mm) | Detect (m) | Observe (m) | Recognize (m) | Identify (m) |
| | 2.8mm(Panorama) | 43.4(142.4ft) | 17.4(57.1ft) | 8.7 (28.5ft) | 4.3(14.1ft) |
| | 2.8mm(Detail) | 43.4 (142.4ft) | 17.4(57.1ft) | 8.7 (28.5ft) | 4.3(14.1ft) |
| | 12mm(Detail) | 162.9(534.6ft) | 65.2(213.8ft) | 32.6(106.9ft) | 16.3(53.5ft) |

ISO9001:2015

ขอสงวนสิทธิ์ในการเปลี่ยนแปลงรายละเอียดโดยไม่ต้องแจ้งให้ทราบล่วงหน้า บริษัท เอช ไอ พี โกลบอล จำกัด

THE BEST
SECURITY SOLUTION